


| Board Number | IC Number |
|--------------|-----------|
| EV12A2-B-01A | SCT12A2   |

## PERFORMANCE SUMMARY


Specifications are at TA = 25°C

Table 1. Performance

| Parameter      | Condition             | Value          |
|----------------|-----------------------|----------------|
| Input Voltage  | DC up to 20V          | 2.7V-20V       |
| Output Voltage | JP3: ON PWM           | 15V $\pm$ 2.5% |
| Output Current | Continuous DC current | 2A             |
| Frequency      | Default               | 400KHz         |

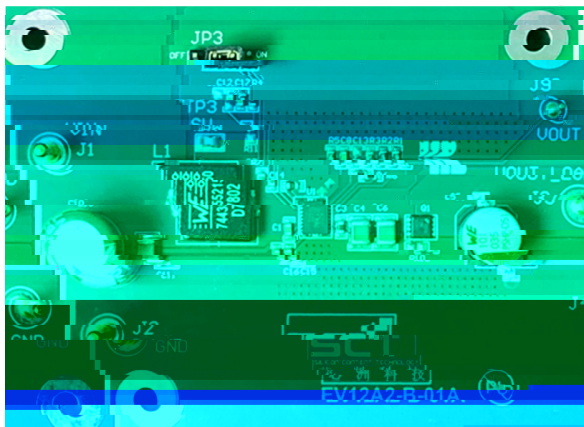

EV12A2-B-01A Evaluation Board Top View

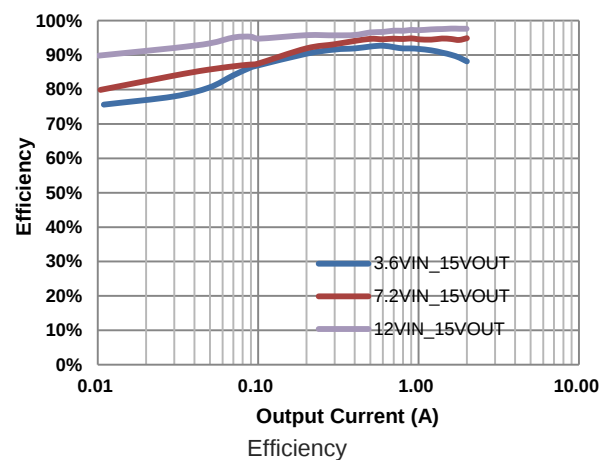

## QUICK START PROCEDURE

Evaluation board EV12A2-B-01A is easy to set up to evaluate the performance of the SCT12A2. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions:
  - JP3: ON Connect EN pin to  $V_{CC}$  to enable IC.
2. With power off, connect the input power supply to J1  $V_{IN}$  connector and J2 GND connector. Turn on the power at the input. Make sure that the input voltage does not exceed 14V, and supports sufficient current limit.
3. Check the output voltage at J3. The output voltage should be 15V typical. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, output voltage ripple, efficiency and other parameters.
4. To use the enable function, apply a digital input to the EN pin of JP3.

### NOTE.

When measuring the voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across relevant capacitor of  $V_{IN}$  or  $V_{OUT}$ . See Figure 2 for proper scope probe technique.

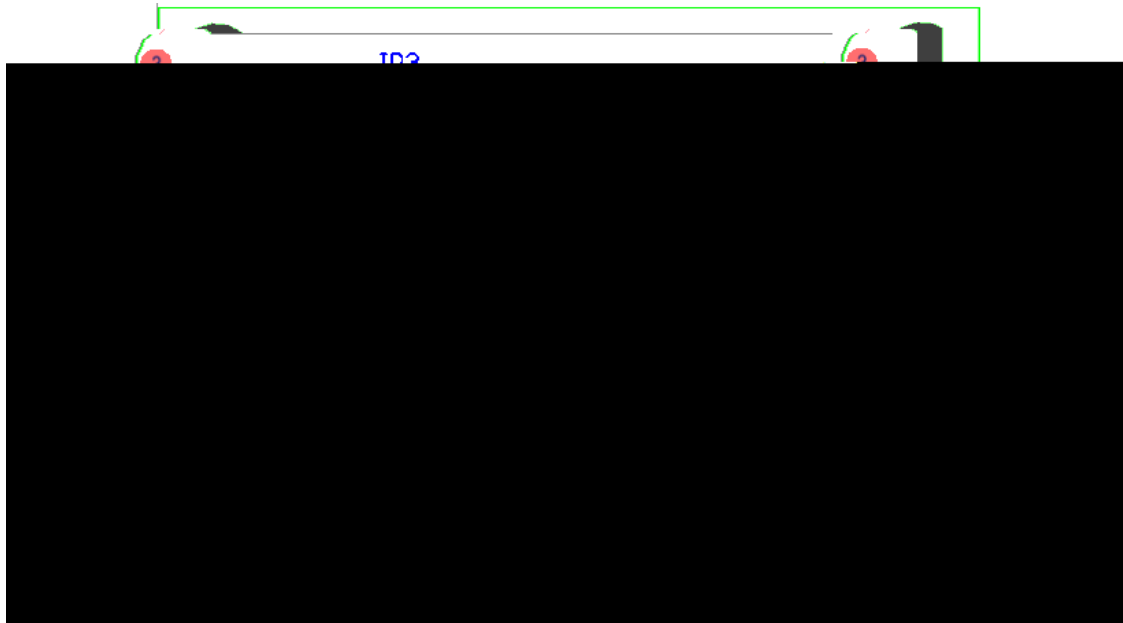


Figure 1. Proper Supply, Load and Measurement Equipment Setup



Figure 2. Measuring Voltage Ripple Across Terminals or Directly Across Ceramic Capacitor

## SCHEMATIC DIAGRAM

Figure 3. Evaluation Board Schematic

## BILL OF MATERIALS

Table 2. Bills of Materials

| Manufacture                | Comment            | Designator     | Description                                                                       | Quantity      |
|----------------------------|--------------------|----------------|-----------------------------------------------------------------------------------|---------------|
| Silicon Content Technology | SCT12A2            | U1             | SCT12A2, 21V/15A Synchronous Boost Converter DFN-20L 3.5mmX4.5mm with thermal pad | 1             |
| Würth Elektronik           | 61300211121        | JP3            | Header, 100mil, 2x1, Tin, TH                                                      | 1             |
|                            |                    | J1, J2, J3, J4 | Terminal Block, 2.2mm, 1-Pos, TH                                                  | 4             |
| Würth Elektronik           | 885 012 206 071    | C1, C16, C17   | CAP, CERM, 0.1 uF, 25 V, +/- 10%, X5R, 0603                                       | 3             |
| Würth Elektronik           | 885 012 206 063    | C8             | CAP, CERM, 4700 pF, 50 V, +/- 10%, X5R, 0603                                      | 1             |
| Würth Elektronik           | C0603C105K8PACTU   | C14            | CAP, CERM, 1uF, 10V, +/-10%, X5R, 0603                                            | 1             |
| Würth Elektronik           | 885012109014       | C11            | CAP, CERM, 22 uF, 25 V, +/- 10%, X5R, 1210                                        | 1             |
| Würth Elektronik           | 885012209028       | C4, C6         | CAP, CERM, 10 uF, 25 V, +/- 10%, X5R, 1210                                        | 2             |
| Würth Elektronik           | C0603C105K3PACTU   | C3             | CAP, CERM, 1 uF, 25 V, +/- 10%, X5R, 0603                                         | 1             |
| Würth Elektronik           | 875115652007       | C5             | Aluminium Polymer Capacitors, 35V, 100uF, SMT                                     | 1             |
| Würth Elektronik           | 870055675009       | C10            | Aluminium Polymer Capacitors, 35V, 100uF, TH                                      | 1             |
| Murata                     | GRM1885C1H470JA01D | C13            | CAP, CERM, 47 pF, 50 V, +/- 5%, C0G/NP0, 0603                                     | Not Installed |
| Murata                     | GRM188R71H102KA01D | C12            | CAP, CERM, 1000 pF, 50 V, +/- 10%, X7R, 0603                                      | Not Installed |
| Murata                     | GRM188R71H473KA01D | C15            | CAP, CERM, 47 uF, 35 V, +/- 10%, X5R, 1210                                        | Not Installed |



**30W**

**EV12A2-B-01A User's Guide**

**EV12A2-B-01A User's Guide**  
**30W Fully Integrated Synchronous Boost Converter in 20-Pin DFN**



## **IMPORTANT NOTICE**

This evaluation board kit being sold or provided by Silicon Content Technology is intended for use for ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY and is not provided by SCT for commercial use. As such, the evaluation board herein may not be complete in terms of required design, marketing, and/or manufacturing related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases SCT from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take