

NAME	PIN	
	ESOP-8	ESOP-8

SCT71405 Series

NAME	PIN FUNCTION		
	TO252-4	TO252-4	
	1		





1

PARAMETER (4-layer)





SCT71405 Series

SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
Power Supply						
	()					
	()					









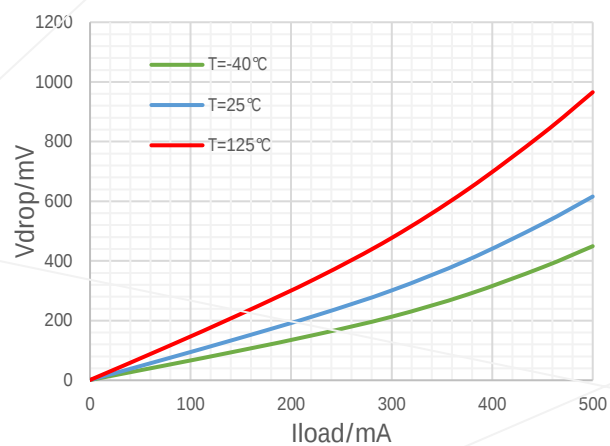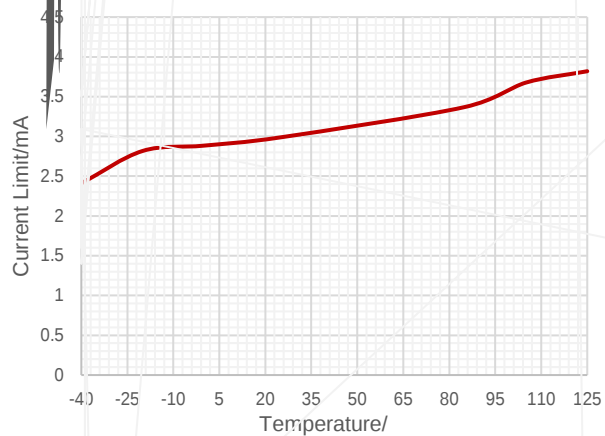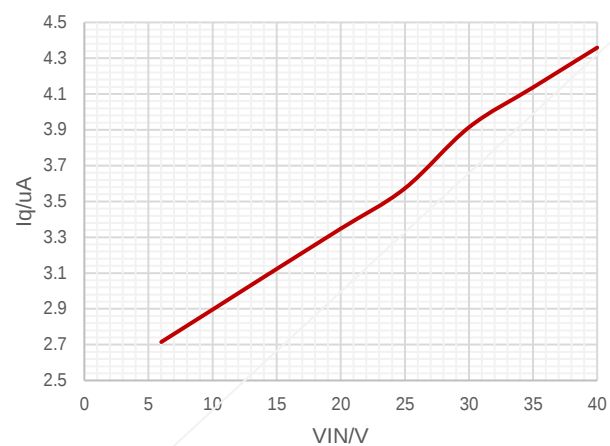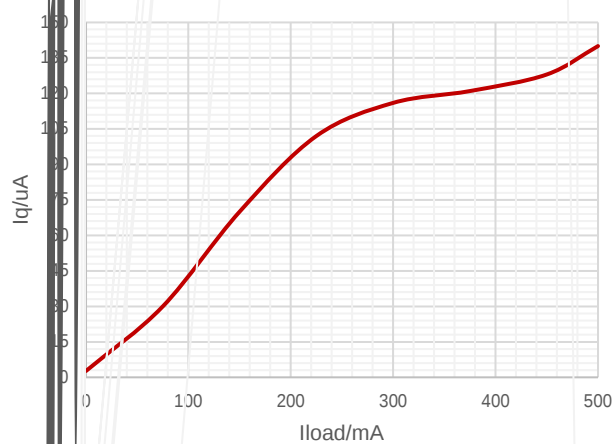


SCT71405 Series

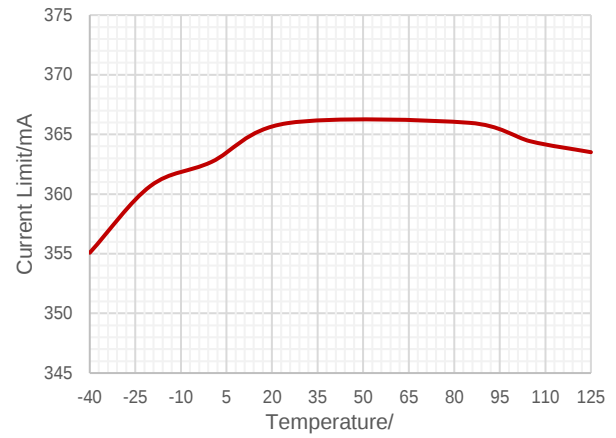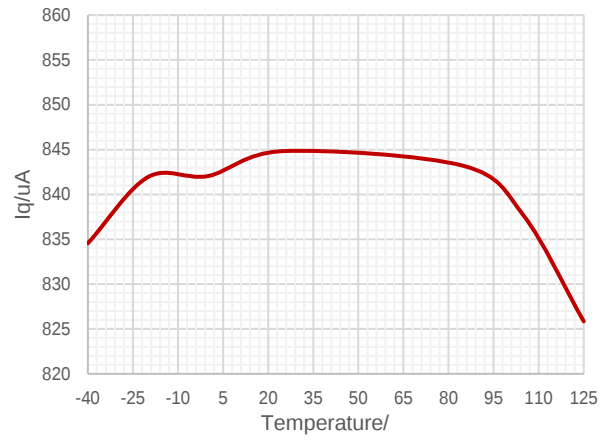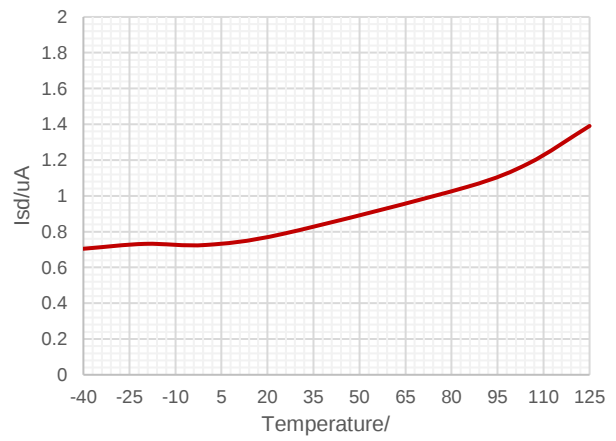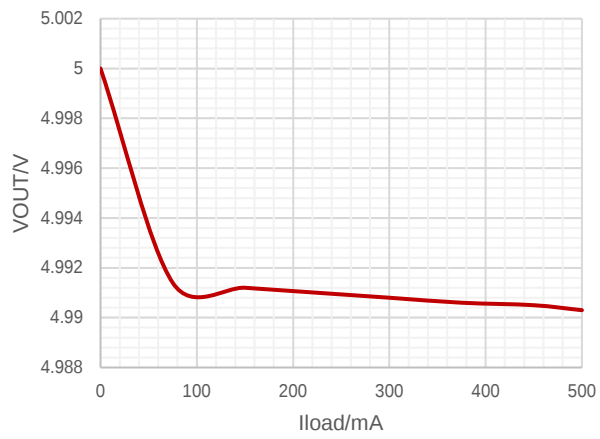

≥

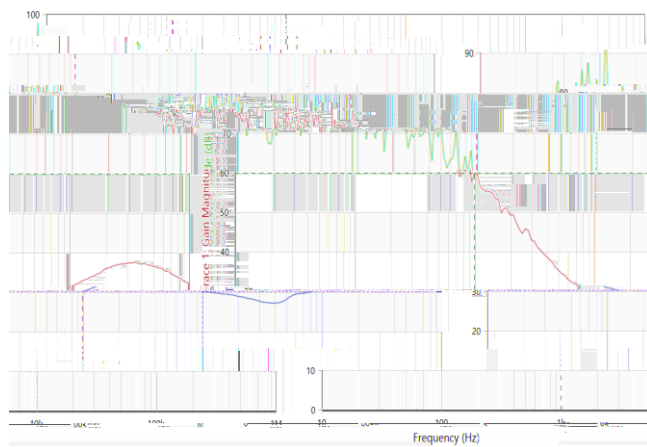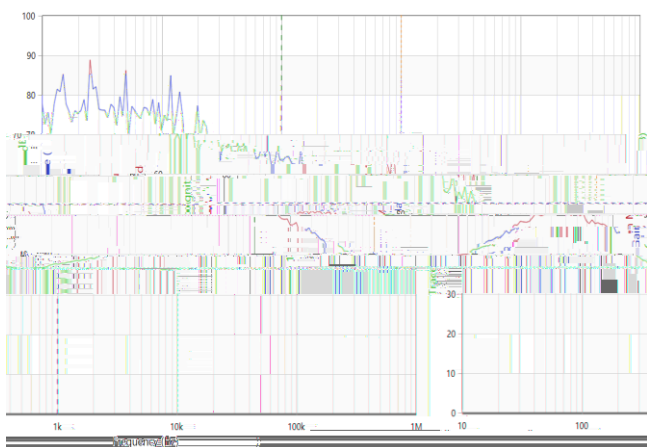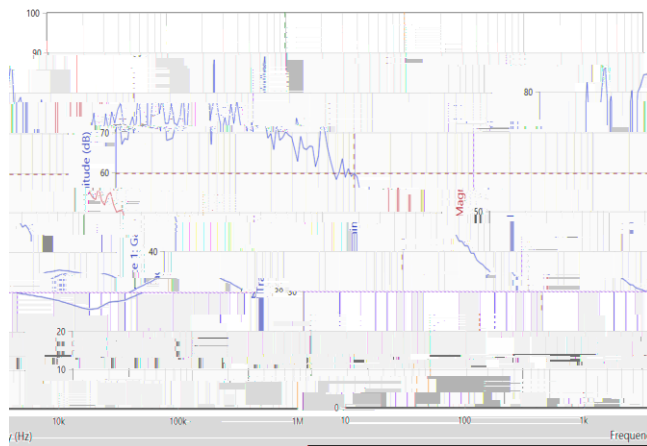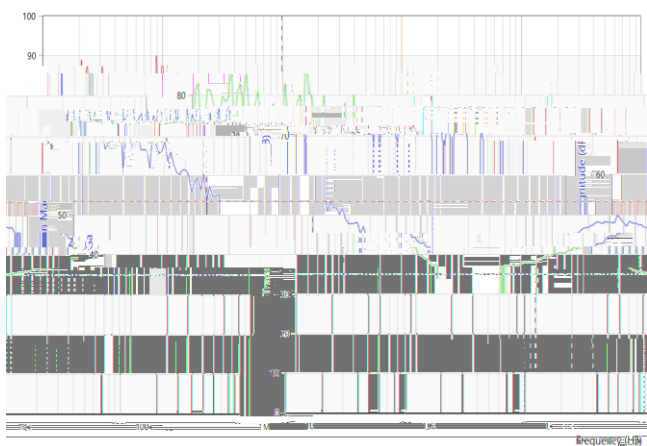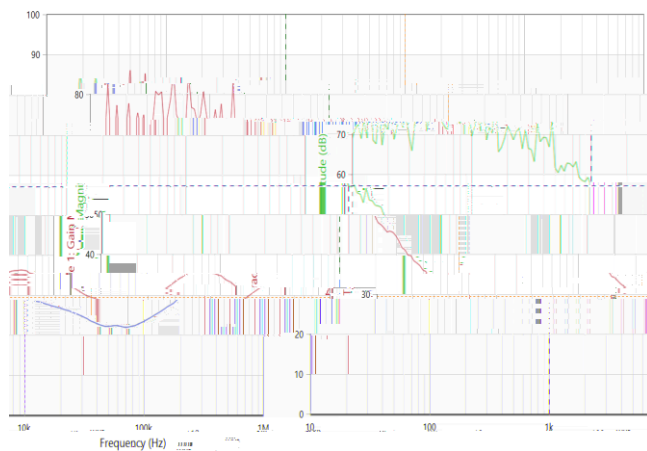


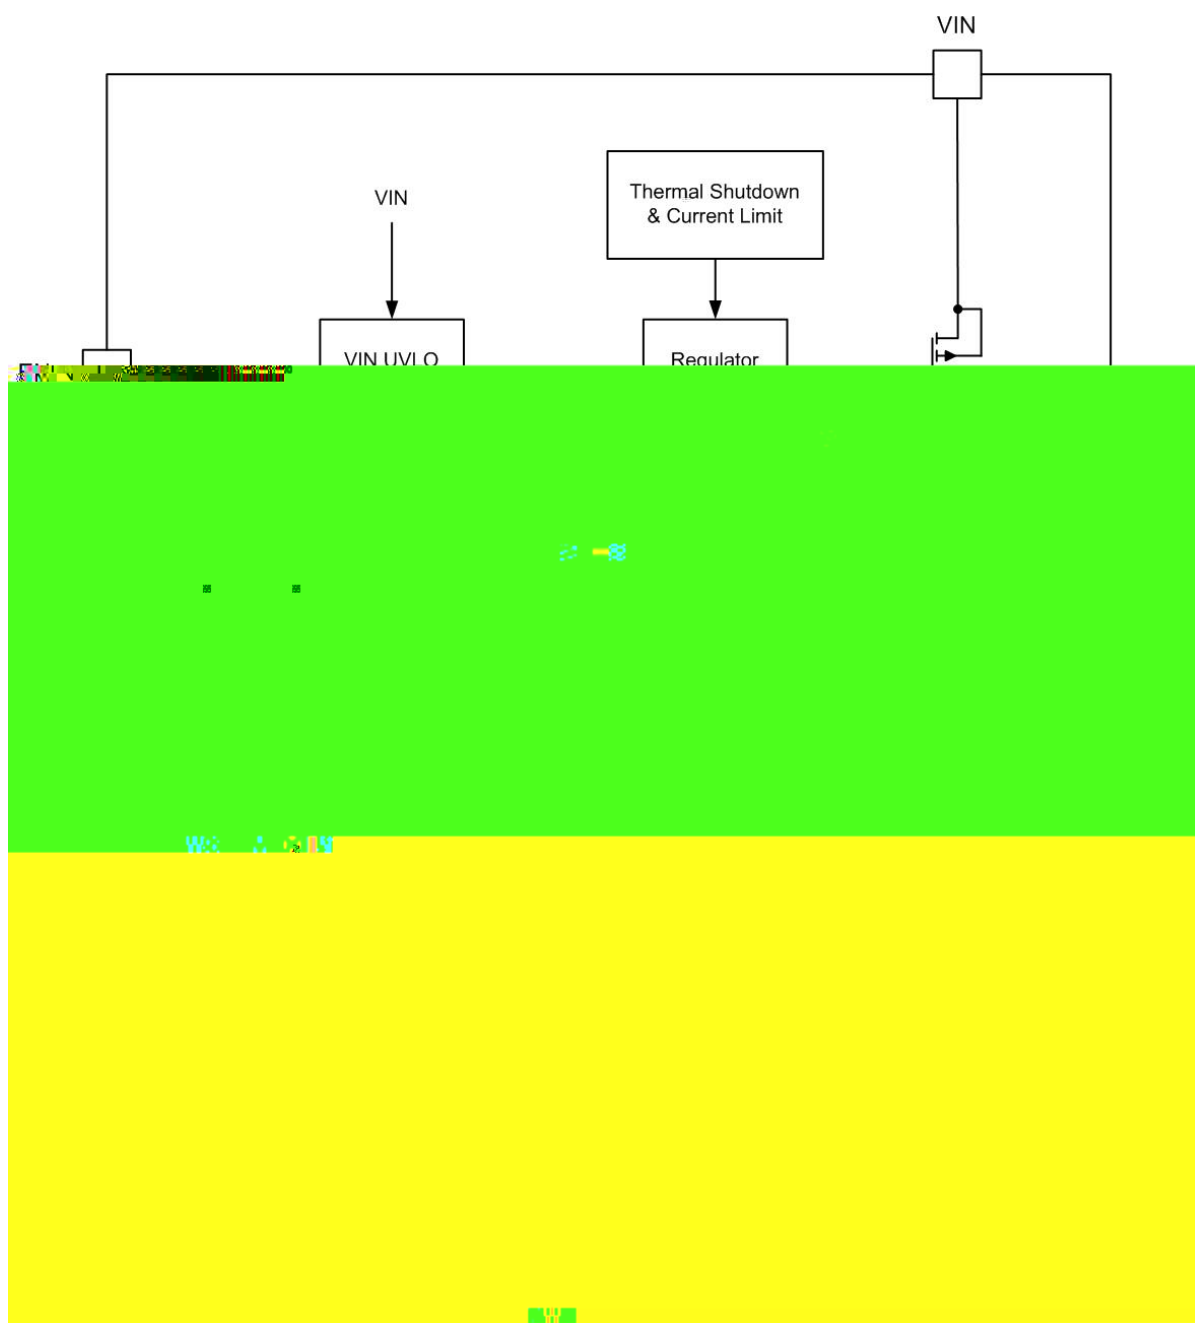

Overview


SCT71405 Series

Over Current Limit and Foldback Current Limit

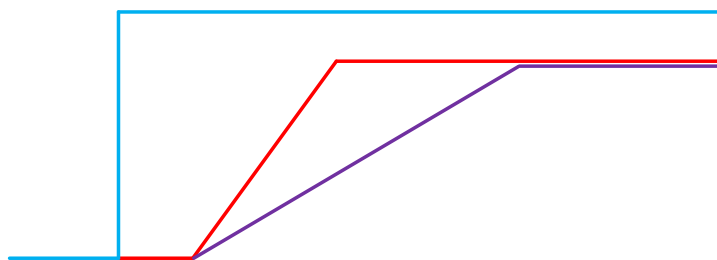

Power-Good and Power-Good Delay

Typical application 1:

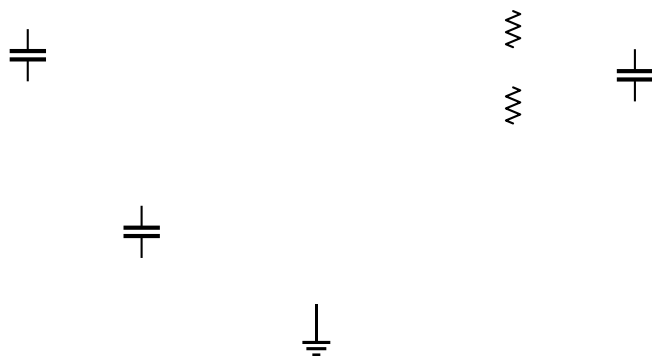

SCT71405 Series






Output Voltage

Table 1: Compensation Values for Typical Output Voltage/Capacitor Combinations

--	--	--	--	--	--







Power Dissipation and Thermal Performance

Application Waveforms

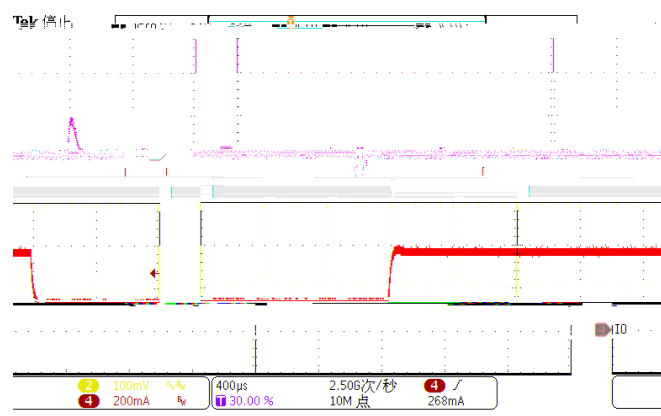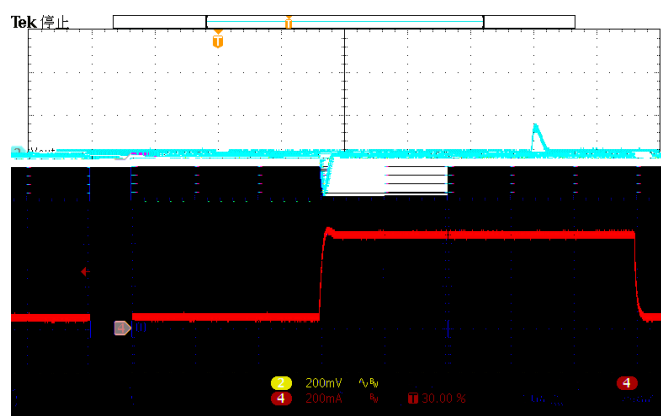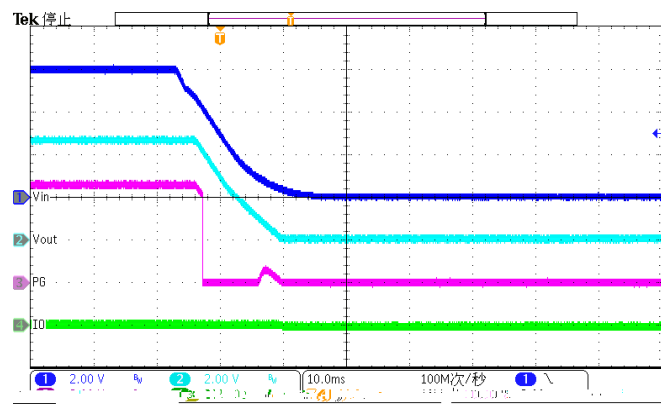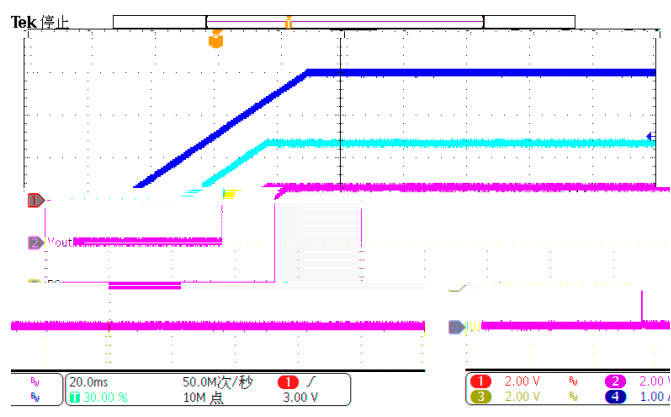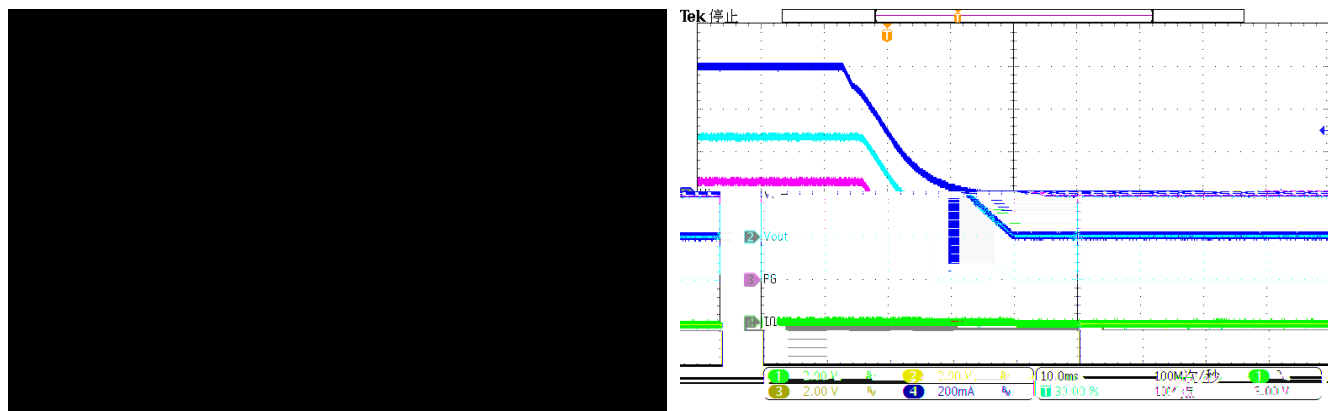

SCT71405 Series

Application Waveforms(Continued)

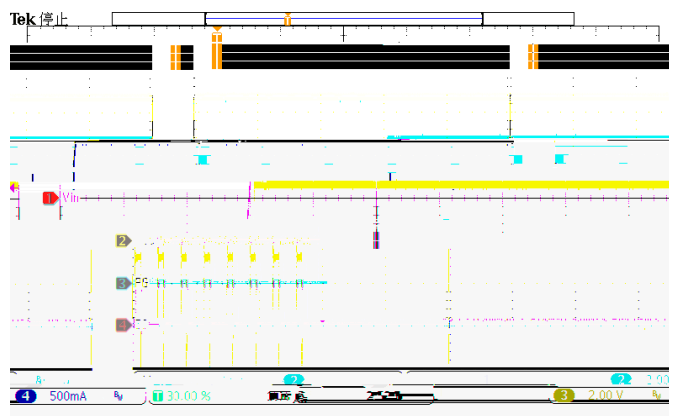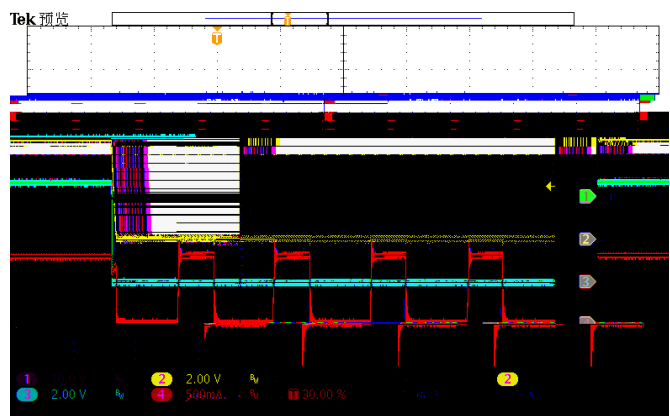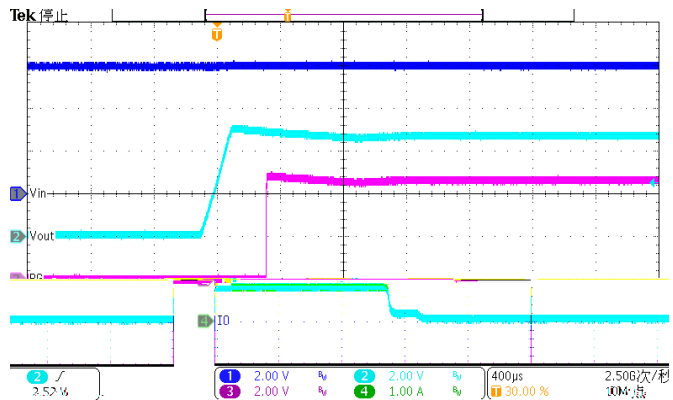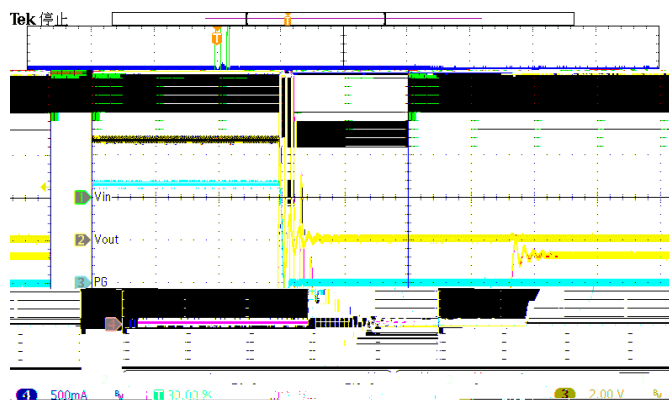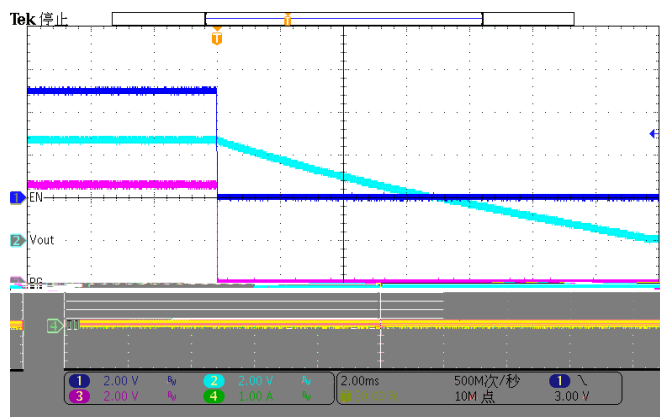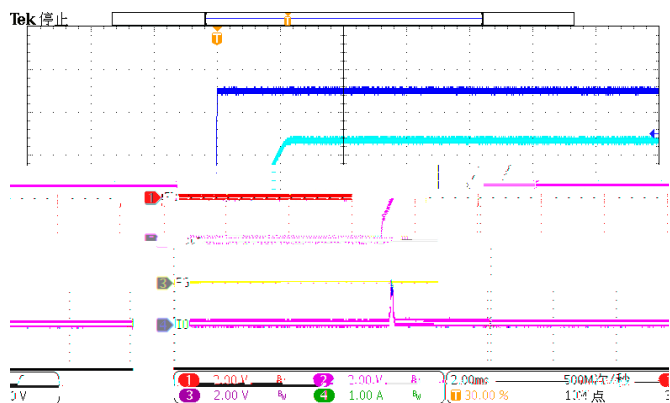

Layout Guideline

- 1.
- 2.

