
NAKAGF ALG

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Revision 1.0: Released to Market

Revision 1.3: Update Iq in page1 and correct TYP in EC table

Revision 1.4: Update PACKAGE INFORMATION (SOT563)

Revision 1.5: Update DEVICE ORDER INFORMATION

Revision 1.6: Update ABS T_J max and add MSL information

NA G F G E LAGF

SCT2220TVAR	Tape & Reel	5000	2220			
-------------	-------------	------	------	--	--	--


2D2 L A D L2 ALAK

V_{IN}=12V, T_J=-40 °C~125 °C, typical values are tested under 25 °C.

V _{IN}	Operating input voltage		4.2	17
V _{IN_UVLO}	Input UVLO	V _{IN} rising	3.9	4.15
	Hysteresis		300	
I _{SD}	Shutdown current	EN=0, No load, V _{IN} =12V	1.5	5
I _Q	Quiescent current	EN=2V, No load, No switching. V _{IN} =12V. BST-SW=5V	135	

enWSnBT/F3 9 Tf1 0 0 1 504.1 569.38 33ETQ EMC /Span /MCID 126/Lang (en-US)E

L H A D L ? A L A K

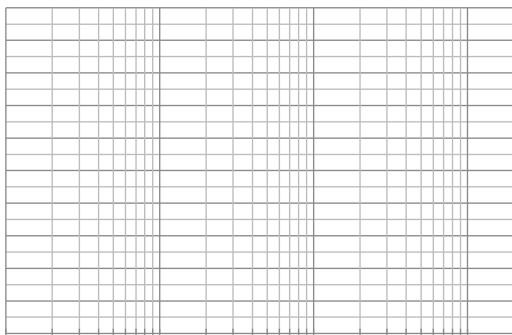

MF LAGF D DG C A E

GH? LAGF

The SCT2220 device is 4.2-17V

In each switching cycle, the inductor current is sensed by monitoring the low-side MOSFET during the OFF period. When the voltage between GND pin and SW pin is lower than the over current threshold voltage, the OCP will be triggered and the controller keeps the OFF state. A new switching cycle will begin only when the measured voltage is higher than limit voltage. If output loading continues to increase, output will dropped below the UVP, and SS pin is discharged such that output is 0V. Then the device will count for 7 cycles of soft-start time for hiccup waiting time and restart normally after 7 cycles' soft-start period.

The SCT2220 features external programmable output voltage by using a resistor divider network R1 and R2 as shown in the typical application circuit Figure 8. Use equation (8) to calculate the resistor divider values.


$$R_1 = \frac{(V_{OUT} - V_{REF}) \times R_2}{V_{REF}} \quad (8)$$

V _{OUT}	V _{REF}	R ₁	R ₂	R ₁	R ₂	R ₁
1.2	4.99	10	2.2	10	2 x 22	100
1.5	8.66	10	2.2	10	2 x 22	100
1.8	12.4	10	3.3	10	2 x 22	100
2.5	21.5	10	3.3	10	2 x 22	100
3.3	31.6	10	3.3	10	2 x 22	100
5.0	52.3	10	4.7	10	2 x 22	100




The regulator could suffer from instability and noise problems without carefully layout of PCB. Radiation of high-

H C ? AF G E L ~~AGF~~ ~~KGL~~

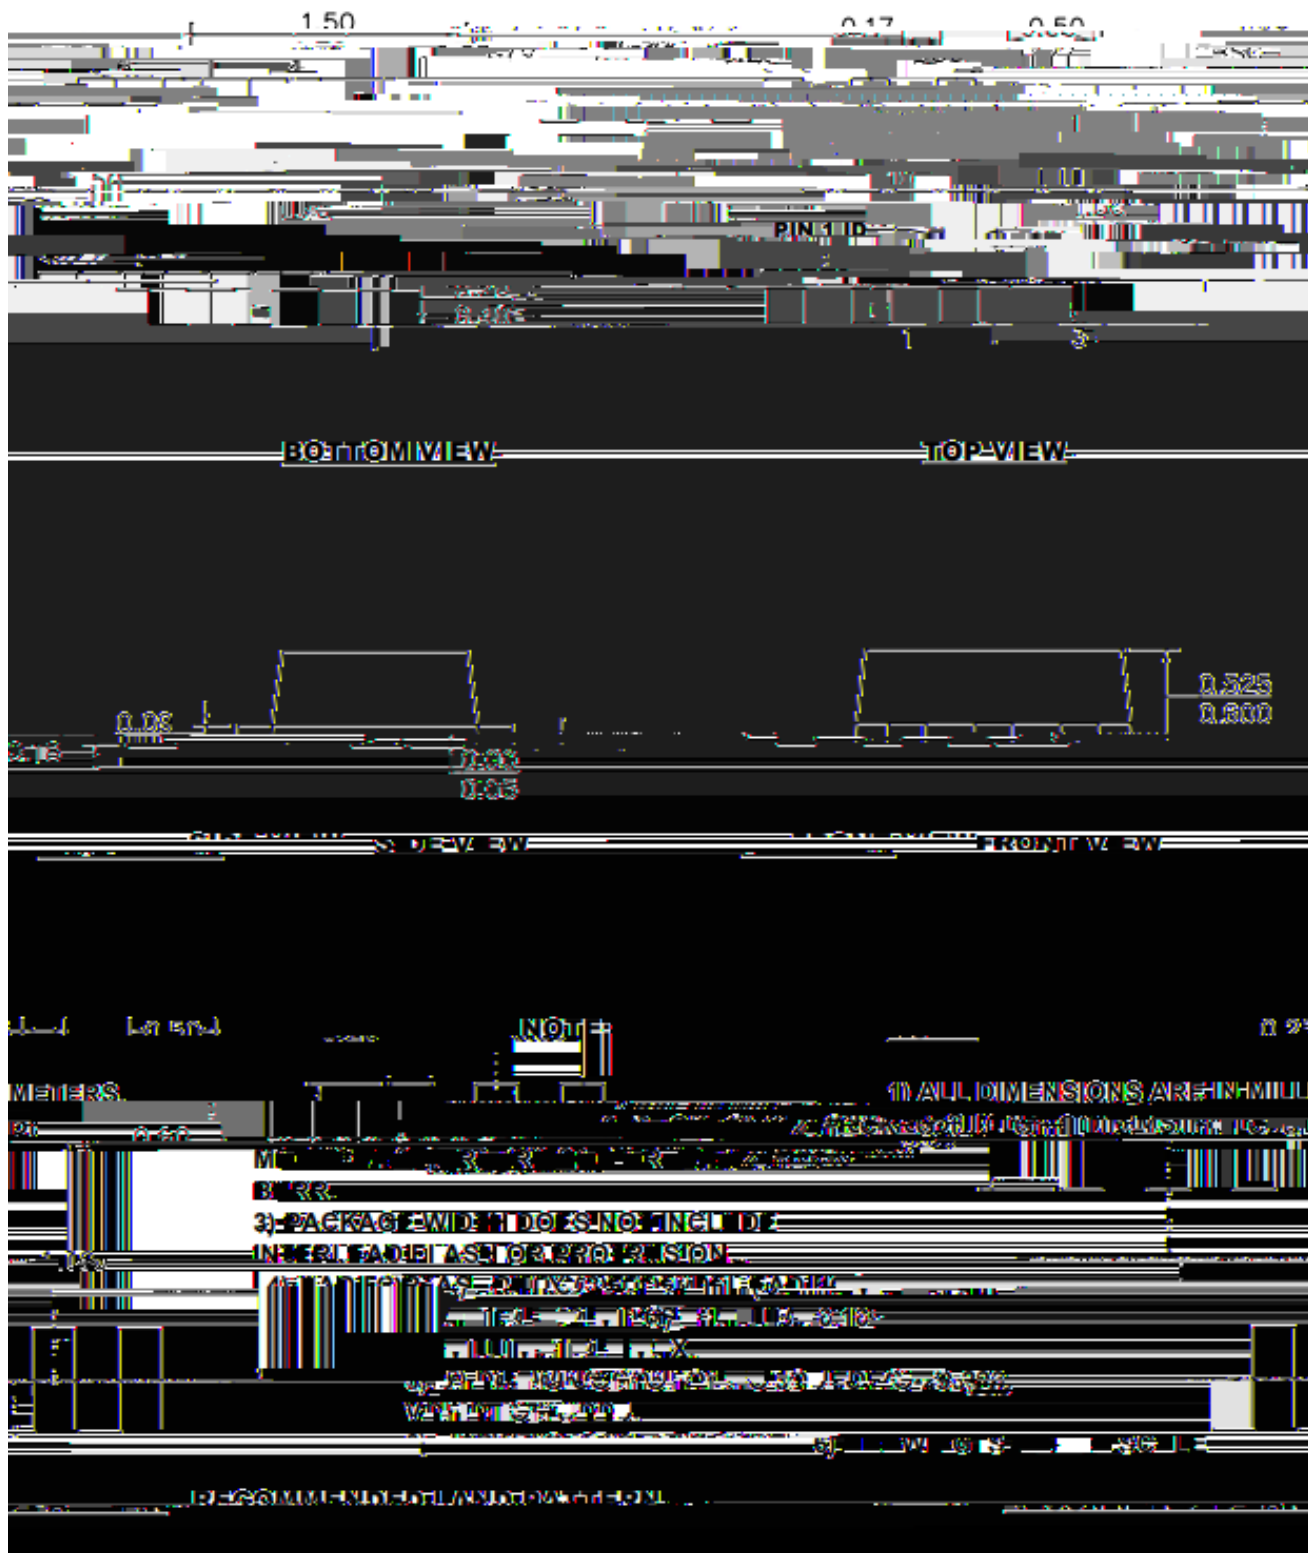

L H2 F 22DA G E LAGF

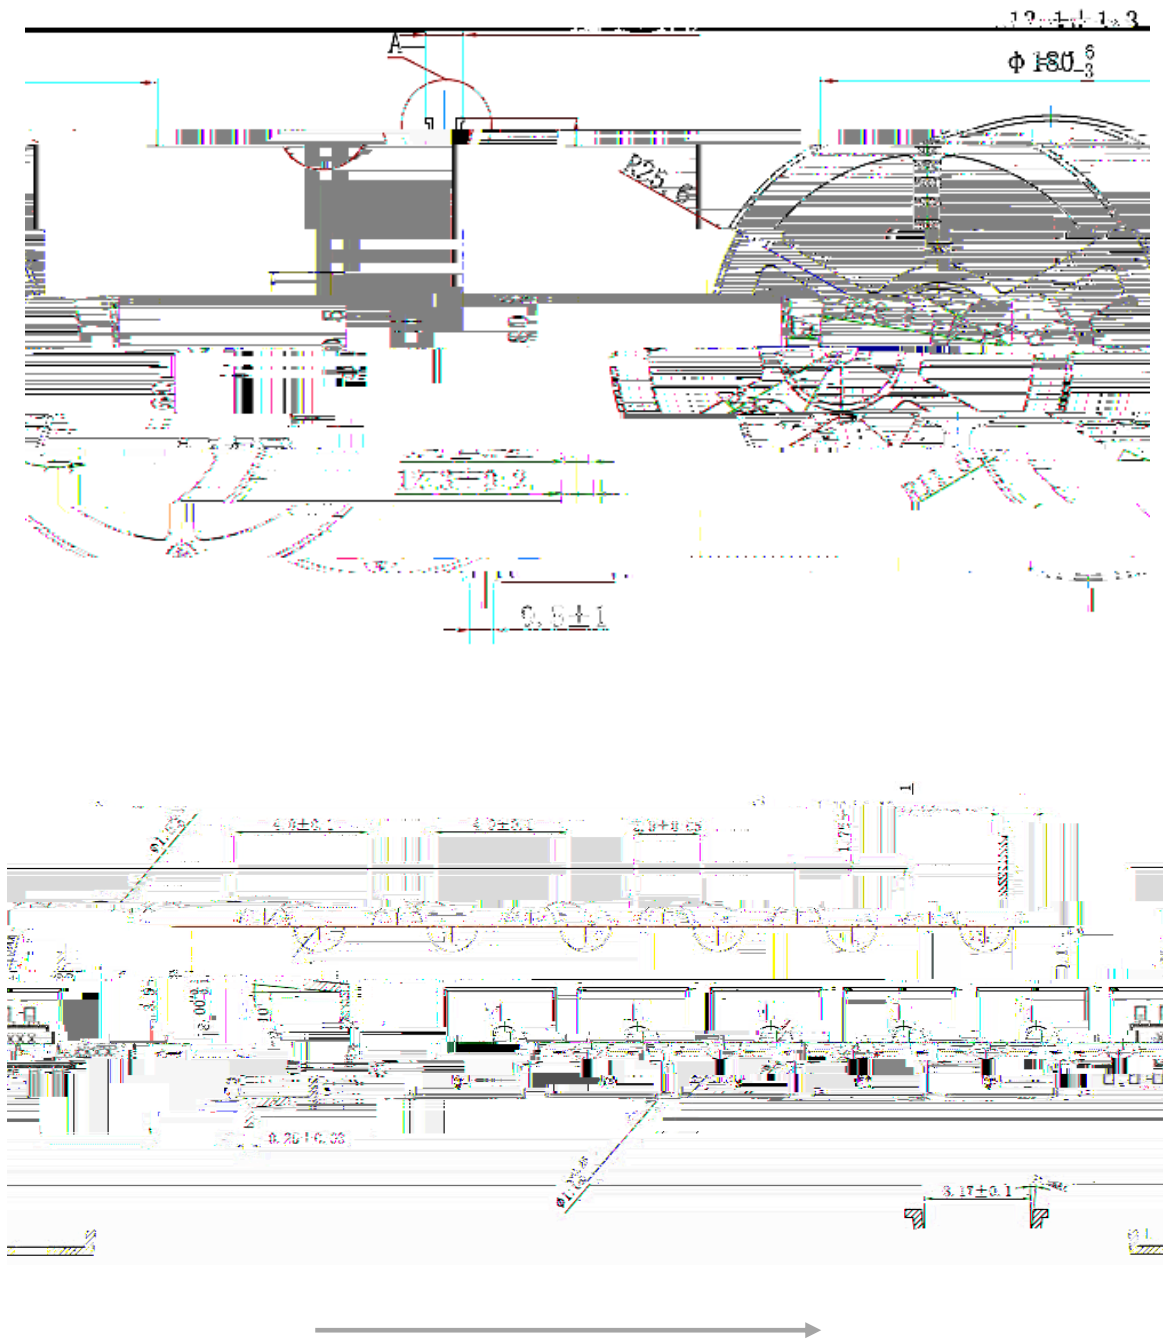

L H2 F 22DAF G E LAGF

