NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Rev 1.0: Release to market

Rev 1.1: Update DEVICE ORDER INFORMATION

Rev 1.2: Update Recommended Component Selections and Recommended FB Resistor Range

Rev 1.3: Update Output Voltage Range and TAPE AND REEL INFORMATION

SCT2233MLUAR	Tape & Reel	5000	7	7L ECLGA (2.5mmX1.7mm)	3

Over operating free-air temperature unless otherwise noted(1)

V_{IN}	-0.3 to 19	V
V_{SW}	-1 to 19	V
V_{SW} <10ns	-2.5 to 21	V
V_{BST}	V_{SW}-0.3 to V_{SW}+6	V
V_{FB}	-0.3 to 6.5	V
V_{EN}	-0.3 to 6.5	

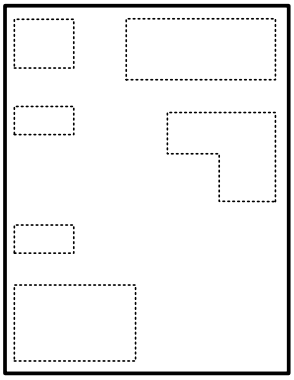

SCT2233M Top View

(2.5mm x 1.7mm)

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

VOUT	1	Power output, please use as large an output capacitor as possible to reduce output voltage ripple.
FB	2	Buck converter output feedback sensing voltage. Connect a resistor divider from VOUT to FB to set up output voltage. The device regulates FB to the internal reference of 0.8V typical.
EN	3	Enable logic input. The device has precision enable thresholds 1.2V rising / 1.12V falling for programmable UVLO threshold and hysteresis.
BST	4	Power supply for the high-side power MOSFET gate driver. Must connect a 0.1μF or greater ceramic capacitor between BST pin and SW node.
SW	5	Power Switching Output. SW is the switching node that supplies power to the output. Note that a capacitor is required from SW to BST to power the high-side switch.
VIN	6	Power supply input. VIN supplies the power to the IC, as well as the step-down converter switches. Drive VIN with a 4.2V to 8.5V power source. Bypass VIN to GND with a suitably large capacitor to eliminate noise on the input to the IC. See Input Capacitor.
PGND	7	Power ground. Must be soldered directly to ground plane.

Over operating free-air temperature range unless otherwise noted

V_{IN}	Input voltage range	4.2	8.5	V
T_J	Operating junction temperature	-40	125	℃

V_{ESD}	Human Body Model(HBM), per ANSI-JEDEC-JS-001-2014 specification, all pins(1)	-2	+2	kV
	Charged Device Model(CDM), per ANSI-JEDEC-JS-002-2014 specification, all pins(1)	-0.5	+0.5	kV

© 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

V_{IN}=8.5V, T_J=-40℃~125℃, typical values are tested under 25℃.

V_{IN}	Operating input voltage		4.2		8.5	V
V_{IN_UVLO}	Input UVLO Hysteresis	V_{IN} rising		4.0 350		V mV
I_{SD}	Shutdown current	EN=0, No load, VIN=8.5V		0.9		μA
I_Q	Quiescent current	EN=2V, No load, No switching. VIN=8.5V. BST-SW=5V		205		μA
V_{EN_H}	Enable high threshold			1.2		V
V_{EN_L}	Enable low threshold			1.12		V
R_{DSON_H}	High side FET on-resistance			50		mΩ
R_{DSON_L}	Low side FET on-resistance			24		mΩ
V_{FB}	Feedback Voltage	T_J=25℃, CCM	0.788	0.8	0.812	V
I_{LIM_LSD}	LSD valley current limit		2.4	3.2	4	A
F_{SW}	Switching frequency	V_{IN}=8.5V, V_{OUT}=5V		1200		kHz
t_{ON_MIN}*	Minimum on-time			70		ns
t_{OFF_MIN}	Minimum off-time			220		ns
t_{SS}	Internal soft-start time			3		ms
T_{SD}*	Thermal shutdown threshold Hysteresis	T_J rising		155 25		℃

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

Figure 1. Efficiency vs Load Current (VIN=7.2V)

Figure 2

© 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

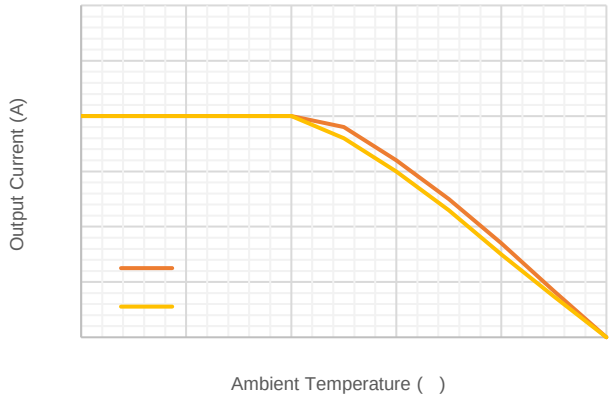

Figure 7. Thermal Derating (VOUT=1.8V, θ_{JA}=60 ℃/W)

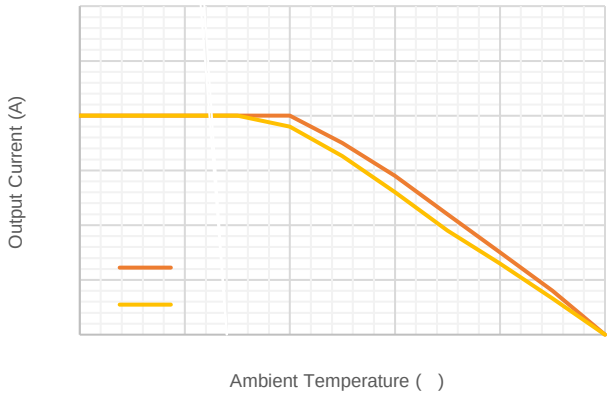

Figure 8. Thermal Derating (VOUT=3.3V, θ_{JA}=60 ℃/W)

Figure 9. Thermal Derating (VOUT=5V, θ_{JA}=60 ℃/W)

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

The SCT2233M Under Voltage Lock Out (UVLO) default startup threshold is typical 4V with VIN rising and shutdown threshold **is** </A (en-US)>BDC q0.00000912 0 612 792 reW* nBT/F2 9.96 Tf1 0 0 1 263.52654 664.06 Tm0 G -0.0178 Tc3.( )37

© 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

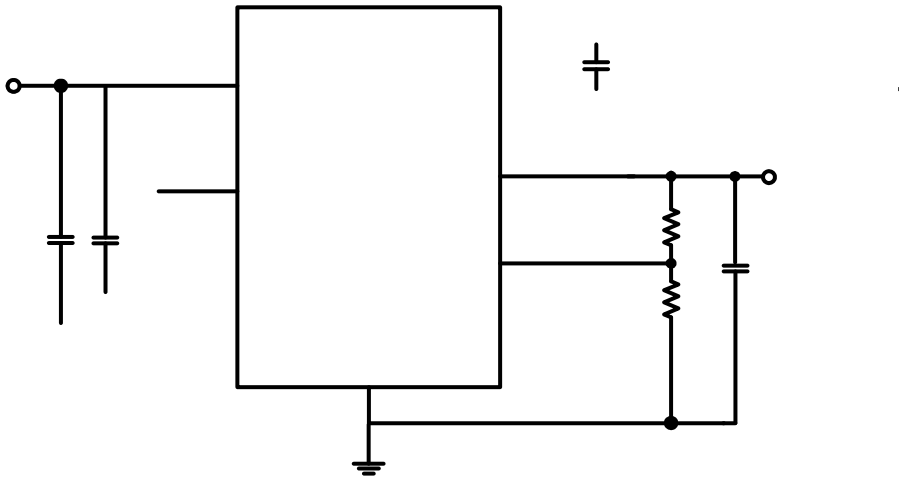

Figure 12. 8.5V Input, 3.3V/2A Output

Input Voltage	8.5V
Output Voltage	3.3V
Output Current	2A
Switching Frequency	1.2MHz
Output voltage ripple (peak to peak)	25mV
Transient Response 0.5A to 1.5A load step	ΔVout = 120mV

© 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

Vin=8.5

© 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

The maximum IC junction temperature should be restricted to 125℃ under normal operating conditions. Calculate the maximum allowable dissipation, $P_{D(max)}$, and keep the actual power dissipation less than or equal to $P_{D(max)}$. The maximum-power-dissipation limit is determined using Equation (9).

(7)

where

T_A is the maximum ambient temperature for the application.
$R_{\psi JA}$ is the junction-to-ambient thermal resistance.

The real junction-to-ambient thermal resistance $R_{\psi JA}$ of the package greatly depends on the PCB type, layout, thermal pad connection and environmental factor. Using thick PCB copper and soldering the GND t(r)-3((n14c4.63n)39(gt)-10(h

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

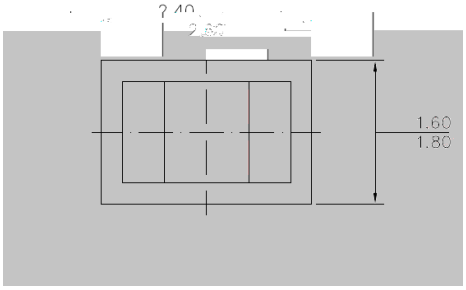

7L ECLGA TOP VIEW

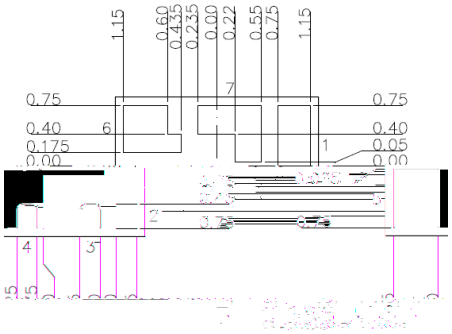

7L ECLGA BOTTOM VIEW

7L ECLGA SIDE VIEW

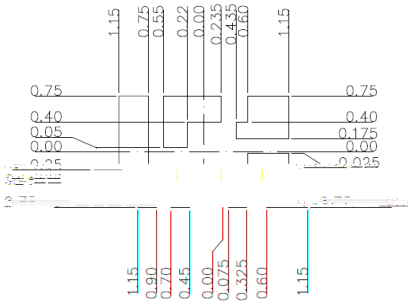

7L ECLGA RECOMMENDED LAND PATTERN

1. Drawing proposed to be made a JEDEC package outline MO-220 variation.
2. Drawing not to scale.
3. All linear dimensions are in millimeters.
4. Thermal pad shall be soldered on the board.
5. Dimensions of exposed pad on bottom of package do not include mold flash.
6. Contact PCB board fabrication for minimum solder mask web tolerances between the pins.

#1 Floor 2 Building 15, Yard 33 Dijin Road, Haidian District, Beijing 100095
(86 10) 64779806 FAX: (86 10) 64779806 www.silicontent.com© Silicon Content 2016

	176	178	330
	58	60	62
	124	-	-
	-	-	144
TYPE WIDTH	-	12.00	-

	1.90	2.00	2.10
	2.70	2.80	2.90

© 2023 Silicon Content Technology Co., Ltd. All Rights Reserved