

%
%
%

%

%

K D Q


KLWROWDJBJ"0 IQ^P%

%

%

%

%

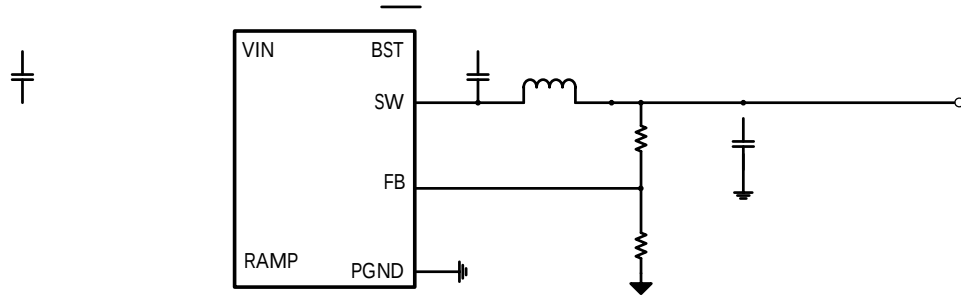

%	


%

%







%

%


%

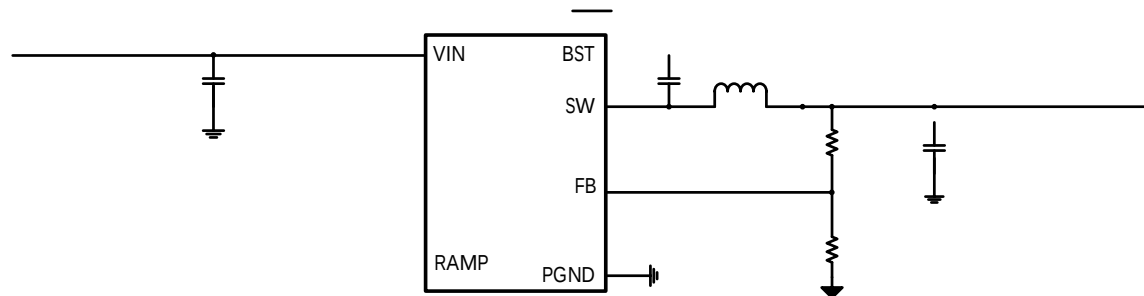


%	

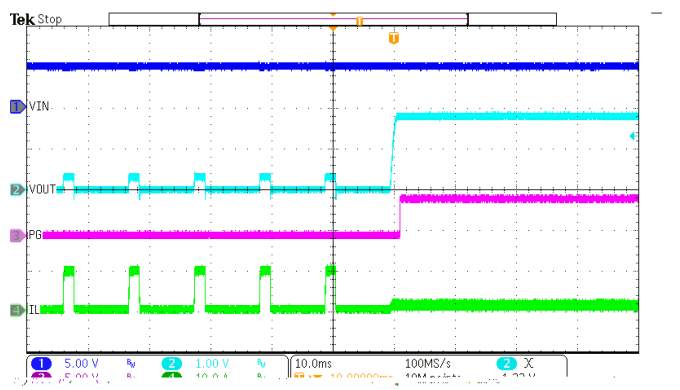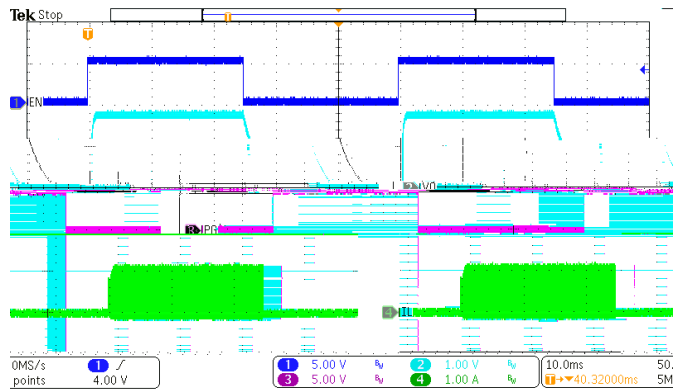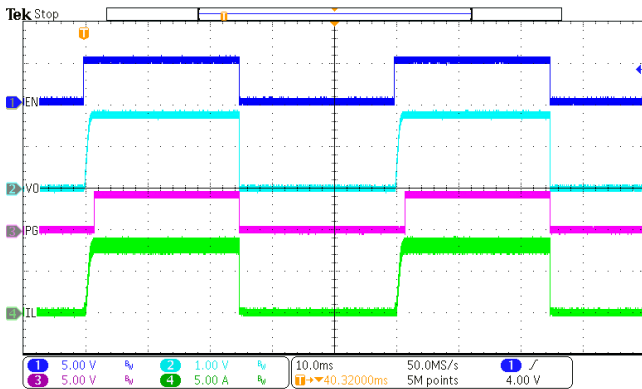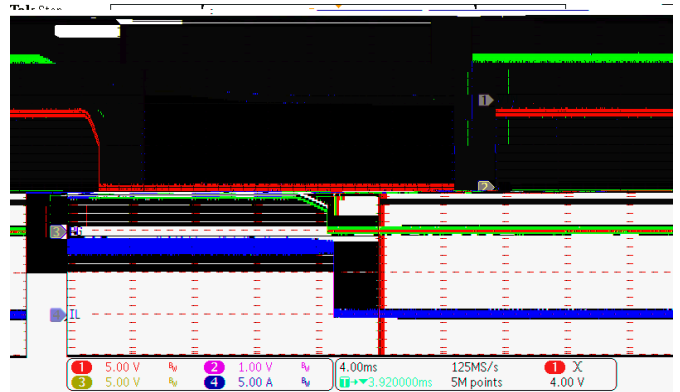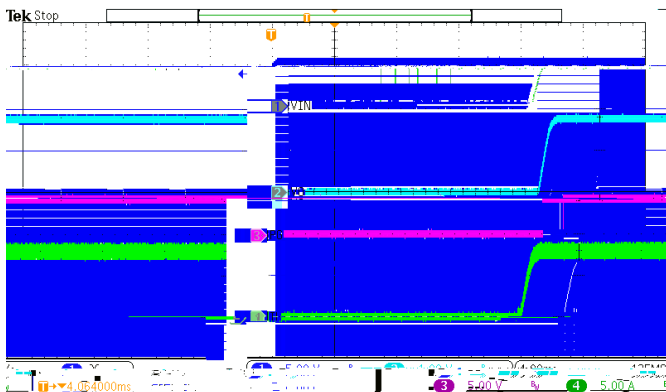



%

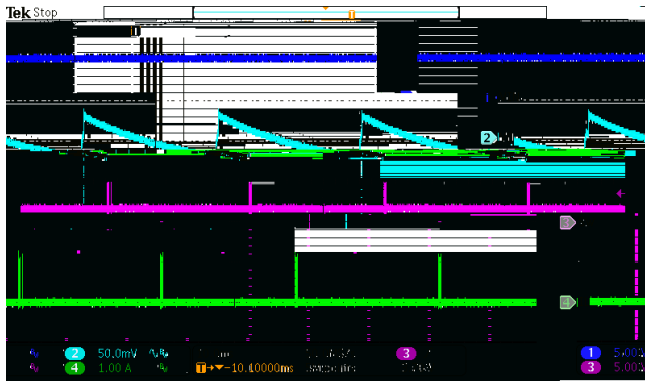



%

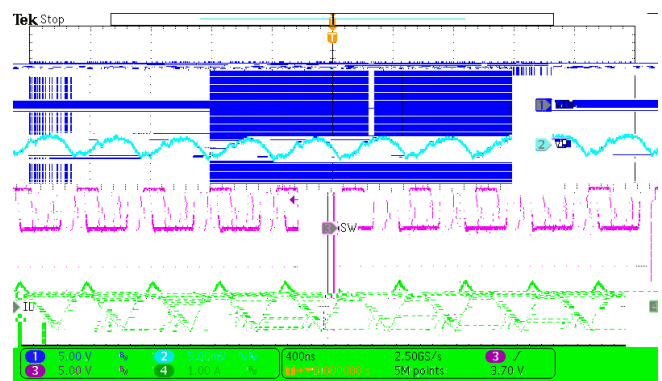

%

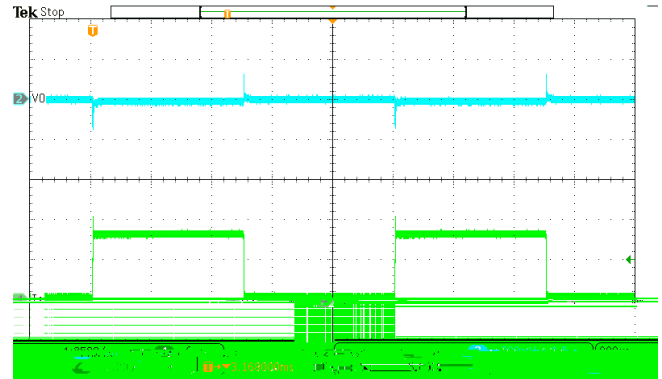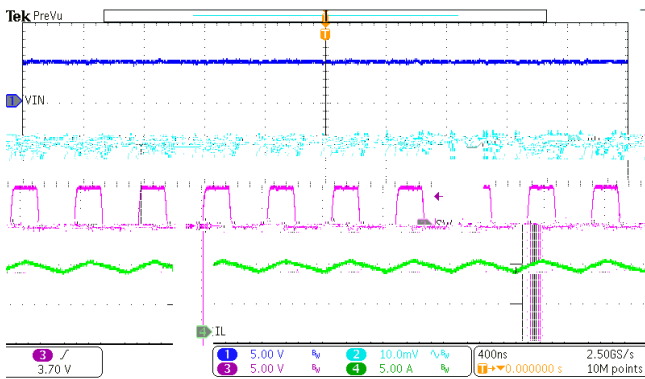

%

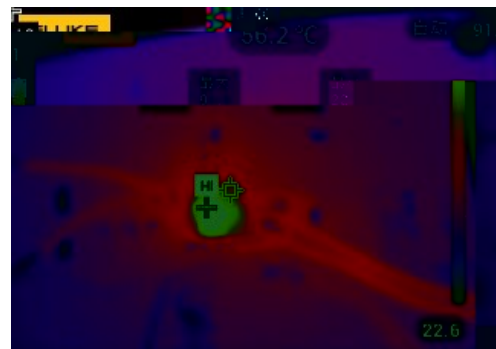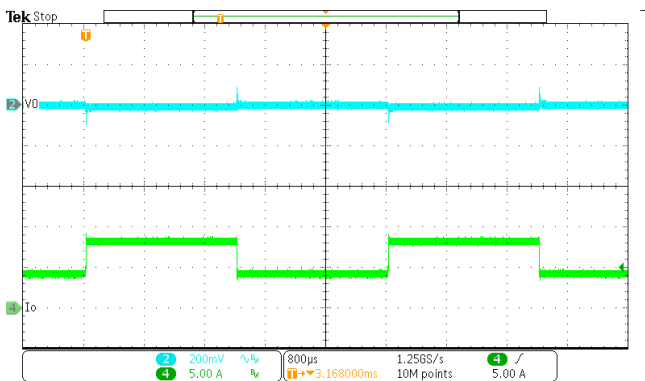

%

%

The bottom layer is a large ground plane connected to the ground plane on top layer by vias it is recommended 8mil diameter drill holes of thermal vias, but a smaller via offers less risk of solder volume loss. On applications where solder volume loss through the vias is of concern, plugging or tenting can be used to achieve a repeatable process.
